



Printing Instructions:


Print this PDF onto lightweight **8.5"x11"** paper. Set the page scaling in your printer settings to **100%** to ensure the pattern pieces will print at the correct size.






Assembly:

- Cut pieces from lightweight woven fabric.
- Finish all raw edges with a zig-zag stitch.
- Sew darts, hem trouser cuffs, and press flat.
- Sew FRONT seams together, spread and press flat.
- Hem WAIST of trousers and press flat.
- Clip, fold and hem one TAB to align to the seam line.
- Sew BACK seams together, to below the TAB.
- Align the edges of each trouser leg together and sew the inseams together:



- Clip seams and turn garment right side out.
- Add fastener of your choice to the back opening.

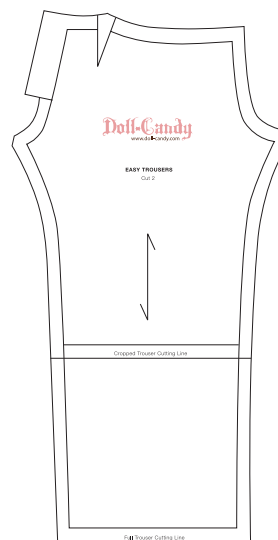

Assemble the pattern by taping the two parts together, as shown above.

